

Note:

1.The installation instructions may differ slightly from the actual operation. If there are any differences,please follow the actual situation or contact us.

2.Warning: Please do not disassemble any part by yourself,any improper operation will not be covered by our warranty.

3.If there is any problem after installation, please record the fault video at the first time and contact our after-sale team




Content

一. Light Strip Harness Diagram	page 1
二. Installation Step	page 2-3
三. Operation Instruction for RGB light strip	page 4-5

一. Light Strip Harness Diagram

multi-function RGB ambient light strip

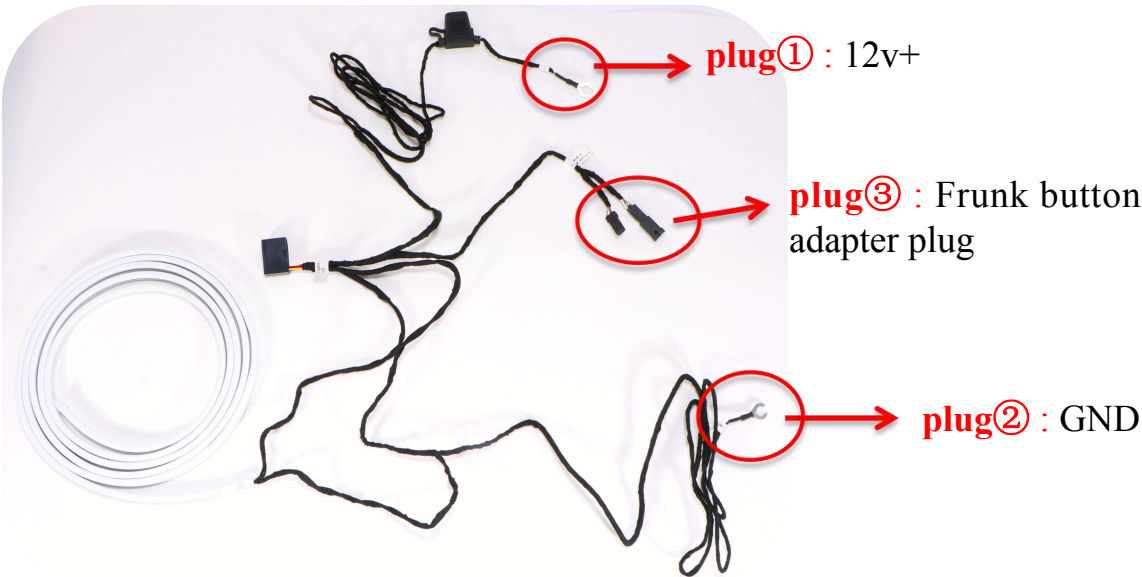

monochrome ambient light



二. Installation Step




1. Remove the conditioning filter element cover and take out the cover



2. Remove the screws as shown by the arrow, Remove the front spare box and connect the harness

3. Intel Version : Power and negative pole position

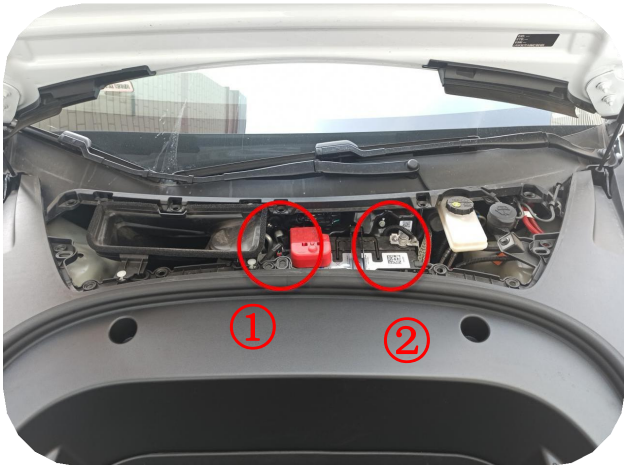

Connect the frunk light **plug ① 12V+** to the battery positive pole;
Connect the **plug ② GND** the negative pole of the battery

4. AMD Version : Power position



Model Y : Positive pole power position



Model 3 : 12V+ power position



Model 3 AMD Version
positive pole fixing screw

Model Y AMD Version
positive pole fixing screw



Negative connection position


Tesla Frunk Ambient Light Installation Manual



Model S AMD Version:
Positive pole power position



Model X AMD Version:
Positive pole power position

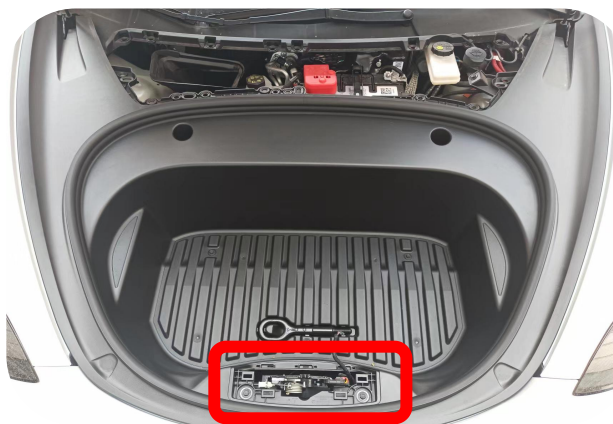

5. After connecting the positive pole and negative pole, put the front spare box back, and place the rest of the harness plugs near the box as shown in the picture



6. Connect the **plug③** of the to the original frunk button plug (For Model X/S 2016-2020: Connect the **plug③** to the frunk light plug)





7. Route the light strip along the edge of the sealing strip of the frunk: Pull the edge of the sealant strip open and plug the light strip in; and then wrap the light strip around the gap at the edge of the sealing strip, as shown in the picture
Note: if the light strip is too long, it can be cut directly from the light strip tail

三. Operation Instruction





Step 1.

- 1): Scan the QR code on the ambient light controller; enter the iPhone or Android App store to download the app
- 2): After downloaded the app, connect the power supply of the light strip, when the light bar is on, turn on the Bluetooth of the mobile phone
- 3): Enter the app interface; click the menu in the upper left corner, then pop up the Bluetooth device and click to enter

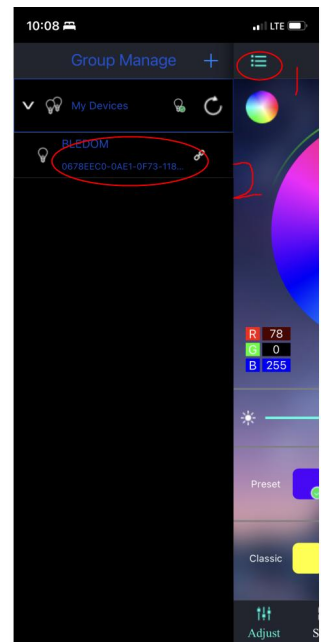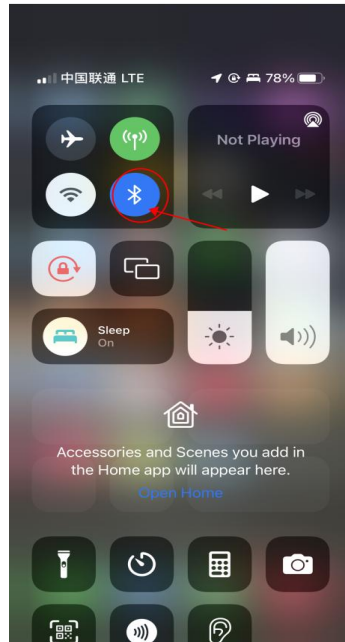

Step 2.

- 1): After entering the operation interface, click the setting icon in the upper right corner
- 2): Enter the RGB setting page, and then click B-G-R in turn
- 3): Click the middle icon to save; then exit the interface to enter the main interface

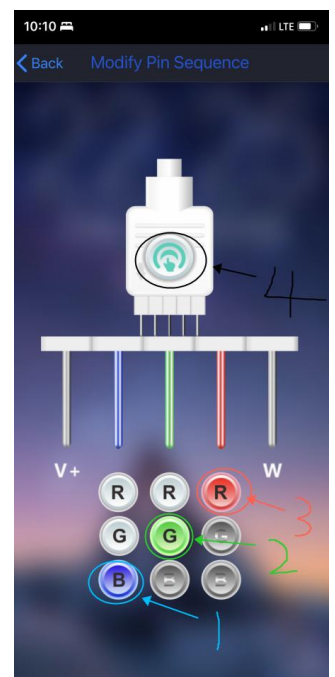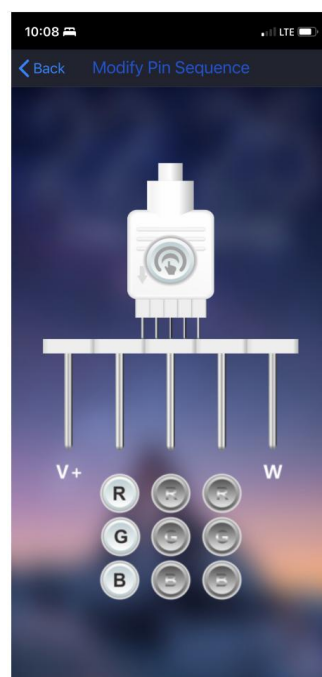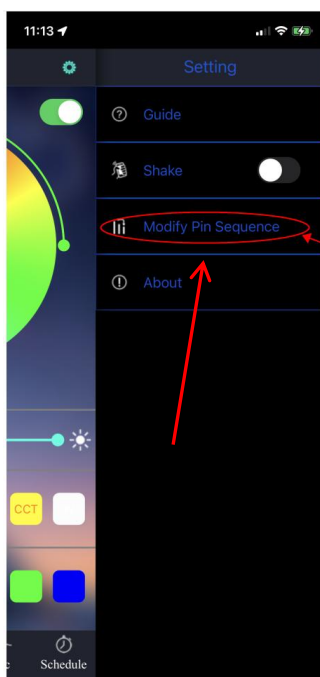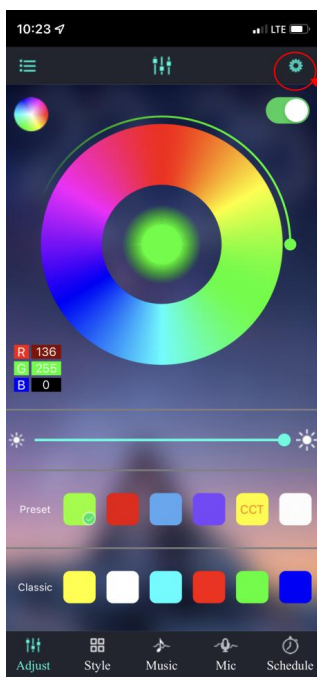

Step 3.

After entering the main interface, you can adjust the monochrome in the palette or adjust in the style option. it can select Static monochrome, three color Strobe Flash or cross fade, seven color Strobe Flash or cross fade and other operations.

