


Model 3/Y Auto Present Door Handle (V5 Pro) Installation Instruction

Packing List

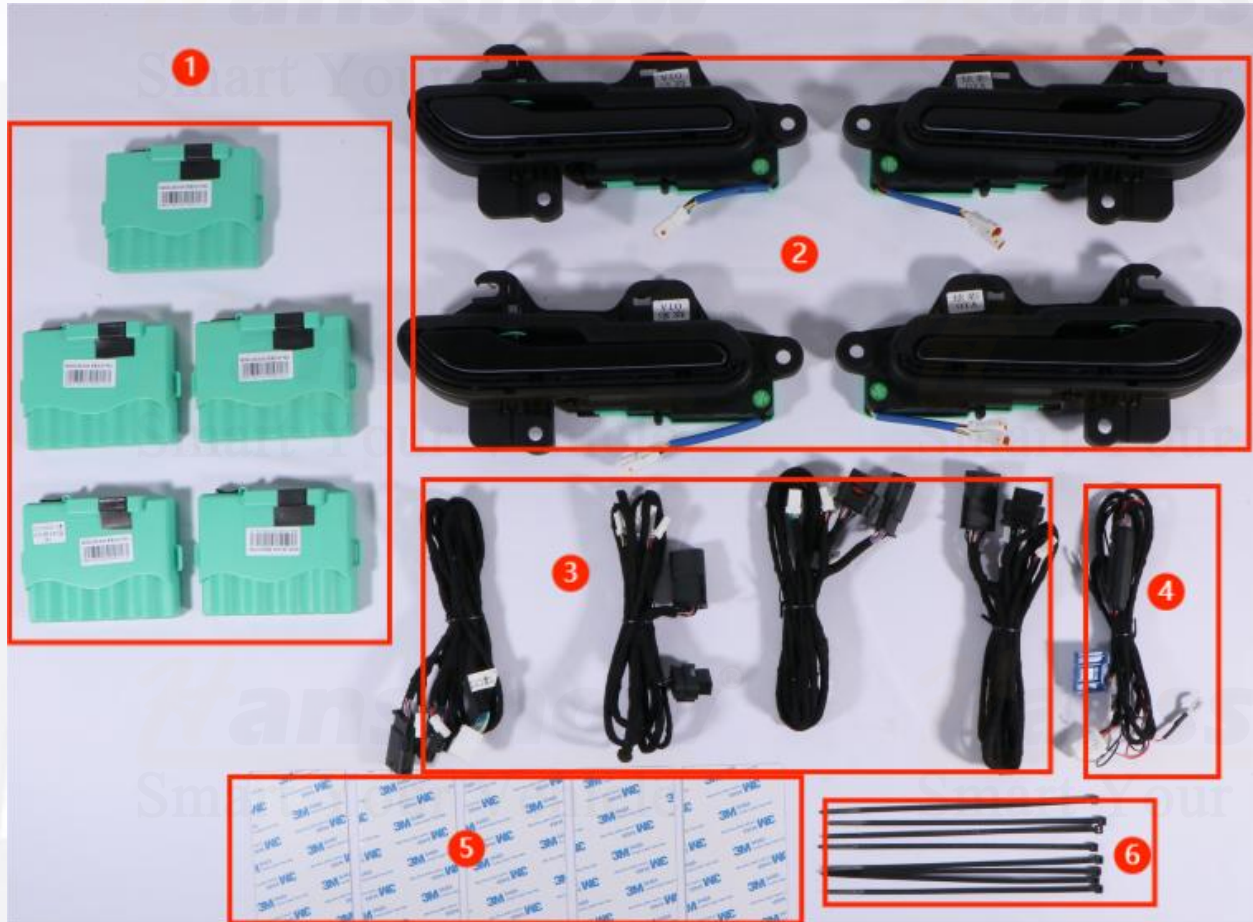

①	Five control boxes	⑤	Five pieces of 3M adhesive
②	Auto door handle	⑥	Cable ties
③	Auto door handle adapter cable	⑦	
④	Main control box power cable	⑧	

1. Tools required for installation

Plastic pry bar; Socket screwdriver

2. Installation precautions

Note: To expedite the installation process, please carefully read this instruction manual.

Inspection Before And After Installation

NOTE

1. Before installation, please check if the product list is complete and free of damage.
2. The installation instructions may differ slightly from actual operation. If there are any discrepancies, please refer to the actual situation or contact us.
3. Warning: Do not disassemble any components on your own. Any improper operations are not covered under warranty.
4. Please watch the installation video and instruction manual before installing the product.
5. Before turning on the product after installation, please confirm that the installation and wiring are correct.
6. Check if the installed product functions properly. If there are any issues, please check if the plug is securely inserted.
7. Check if the original vehicle functions are working properly. If there are any issues, please check if the plug is securely inserted.
8. Please do not install the product if you receive a damaged item. Please take photos immediately and provide them to our after-sales team for confirmation. Photos should be provided that include all parts of the product and can display the damage. (If the product is notified of the damage after installation, claims and reissues will not be accepted, and you will need to purchase the parts again at your own expense.)



installation manual




video tutorial

Aftersale Contact

**Phone/whatsapp: +86 130 4421 9654
+1-949 3584 793**

Email: support@hansshow.com

Installation Step

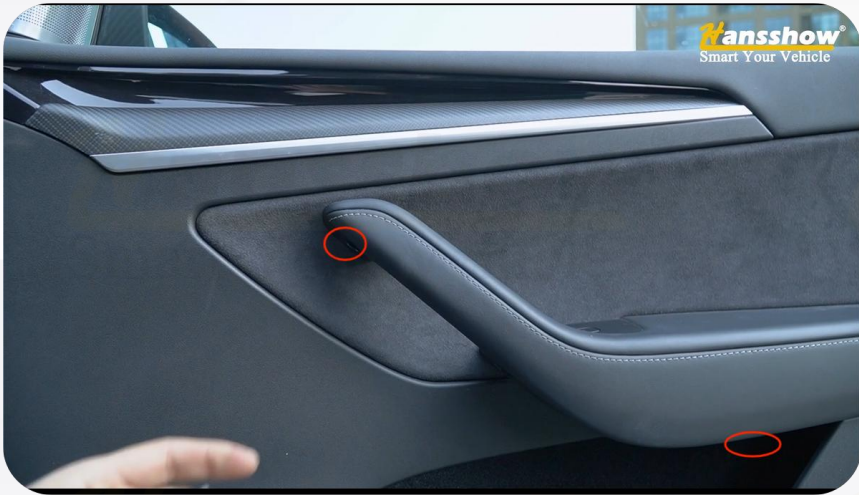

1. Loosen these two screws



2. Pry open this and then unscrew the screw



3. Pry open this speaker and then unplug the connector




4. Use a pry bar to pry it open and then lift it upwards to remove the door trim panel

Installation Step




5. Unplug the door connector

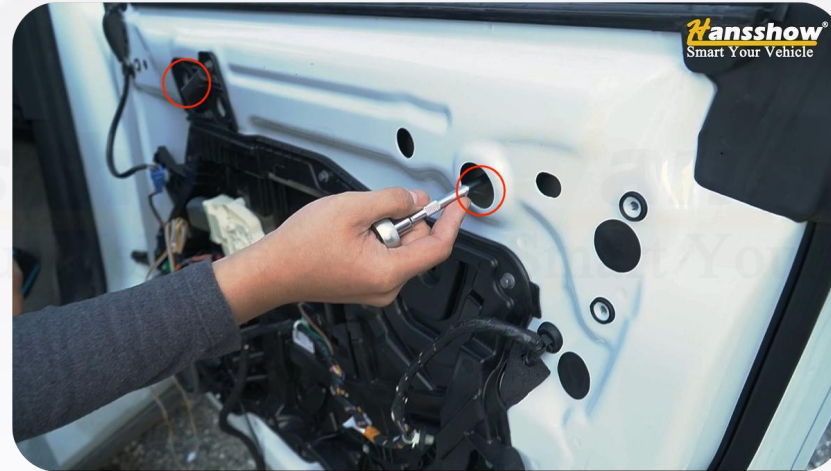

6. Loosen these two screws (with the window raised to the highest position)




7. Remove the window sealing strip and then lift the glass upwards to extract it

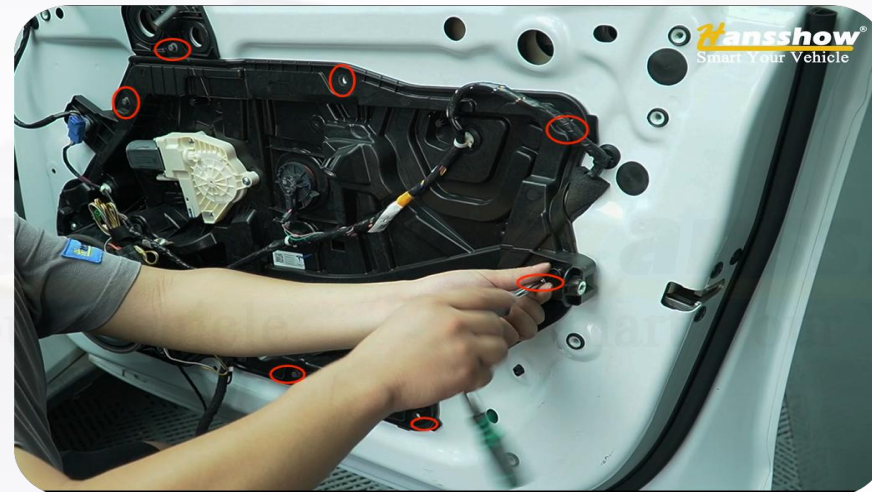


8. Loosen the surrounding screws


Installation Step

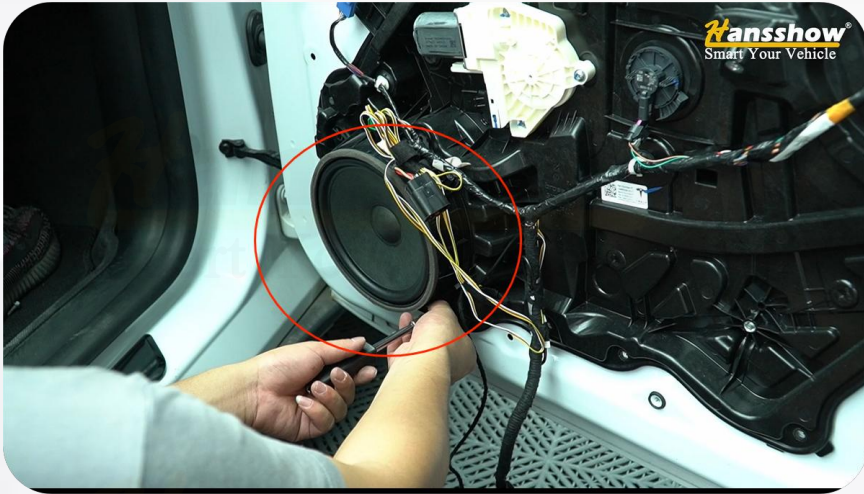

9. Loosen the screws around the speaker

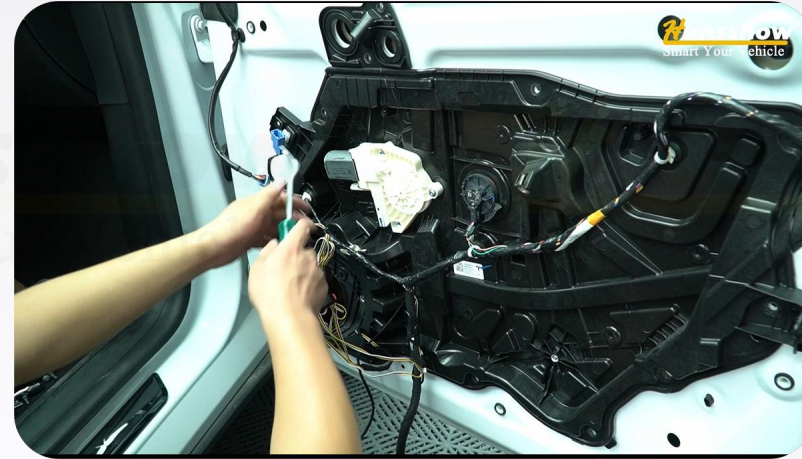

10. Pry open the connector of the wires inside the interior trim panel and unplug it

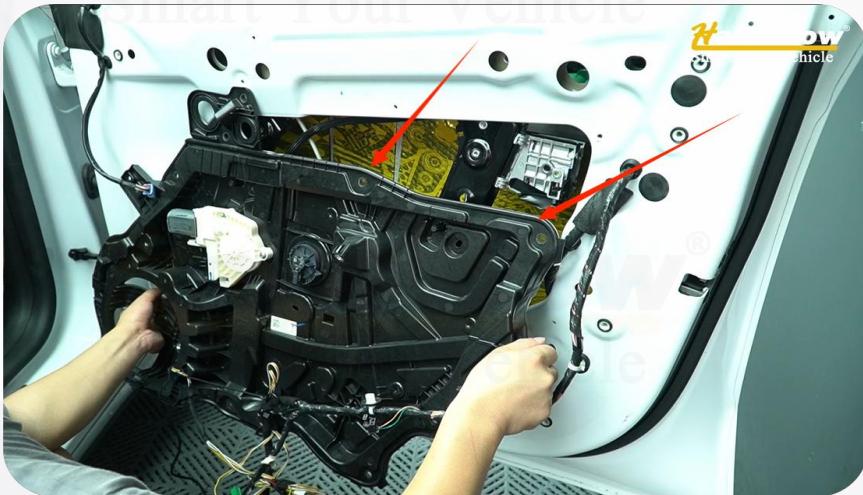


11. Remove the interior trim panel




12. Loosen the screws along these three locations and unplug the door handle connector


Installation Step

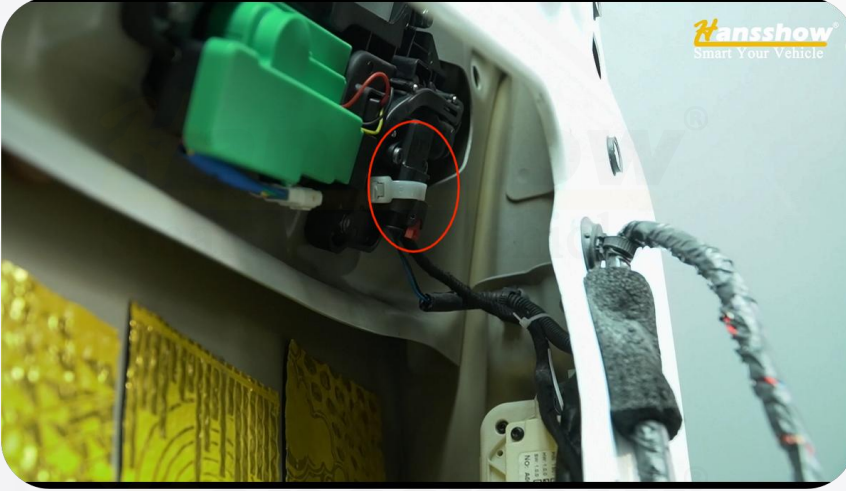


13. Pull out the plug

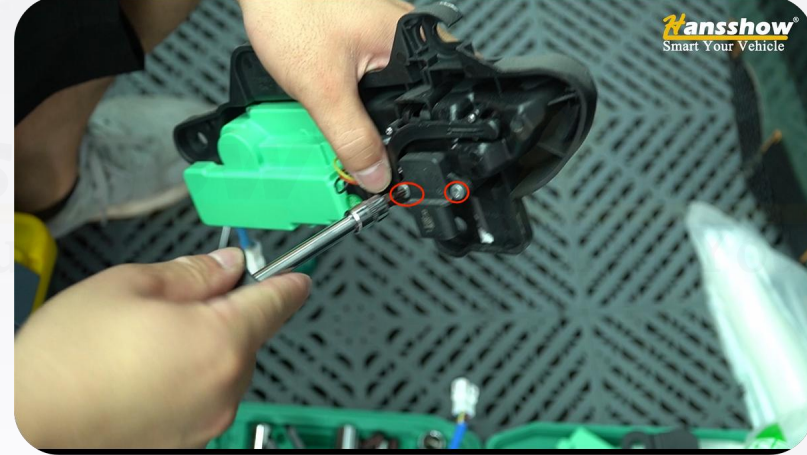

14. Loosen these two screws to remove the original vehicle module

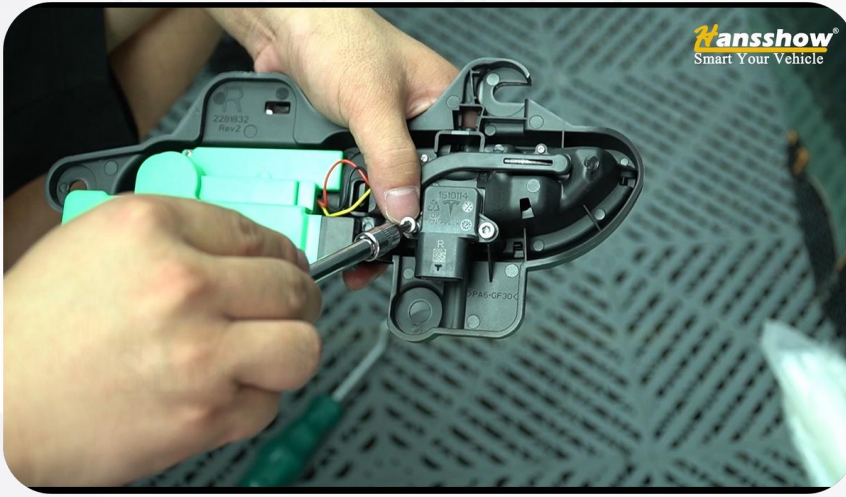

15. Install the original vehicle module onto the power door handle

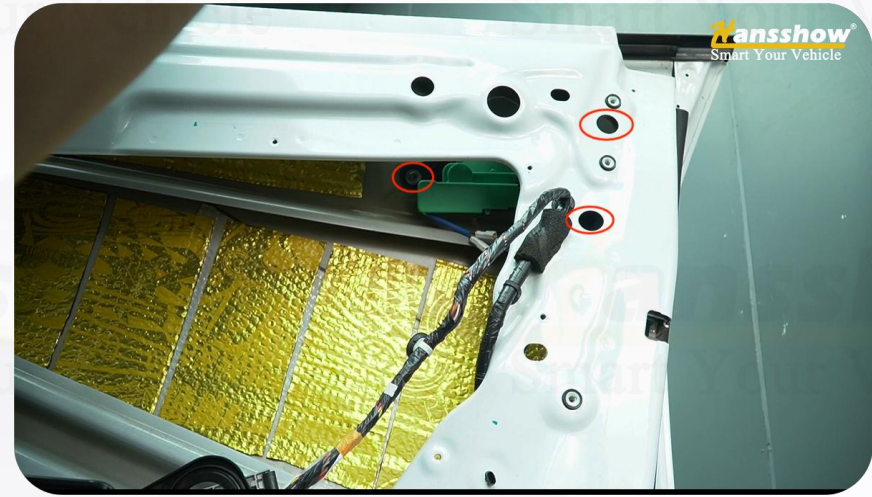


16. Tighten the three securing screws


Installation Step



17. Plug in the colorful door handle connector

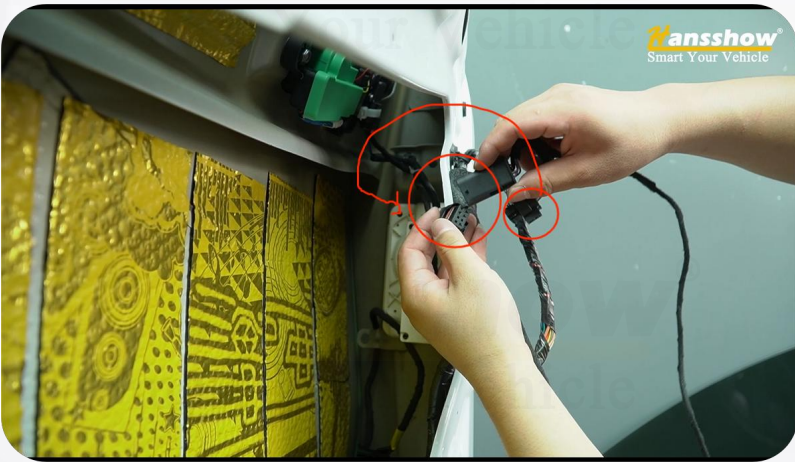

19. Connect the adapter plug to the original vehicle plug, and connect the other plug to the original vehicle lock block

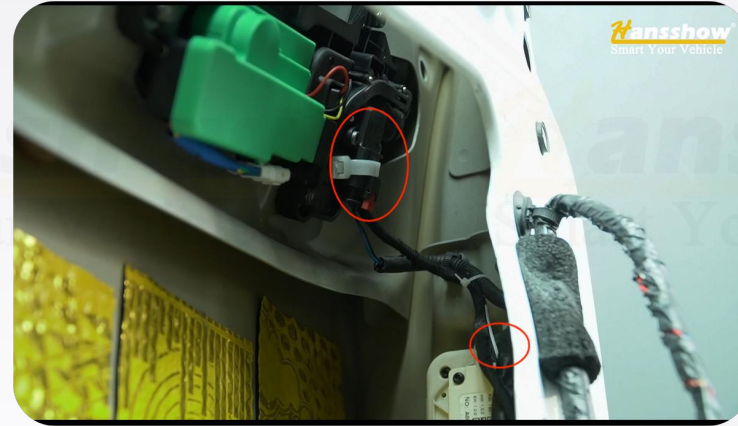


18. After plugging in the connector, remove the plug of the original vehicle lock block




20. Secure the wires along the original vehicle harness using cable ties (pay attention to the position during window operation)


Installation Step

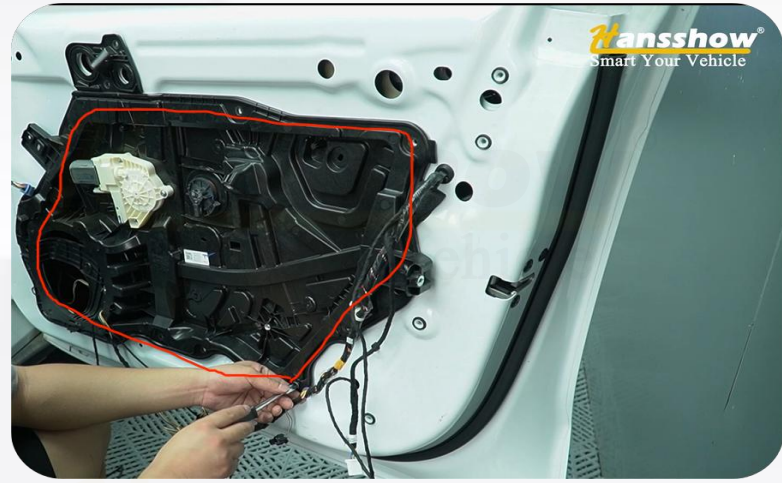


21. Tighten the screws

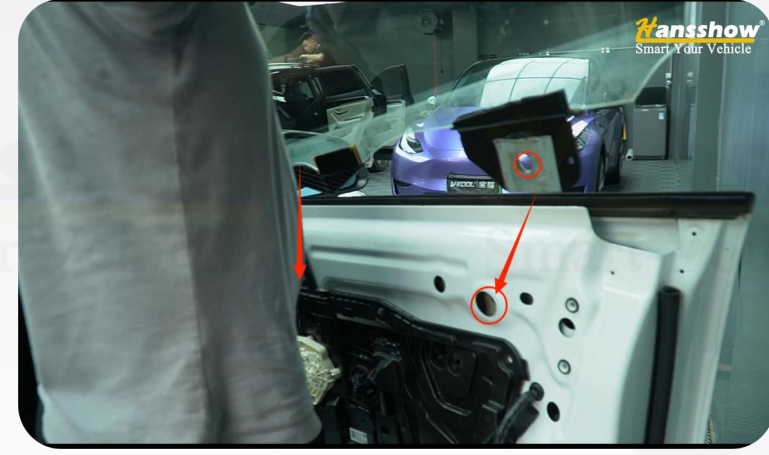

22. Align the holes with the clamp of the window regulator and tighten the screws to secure it

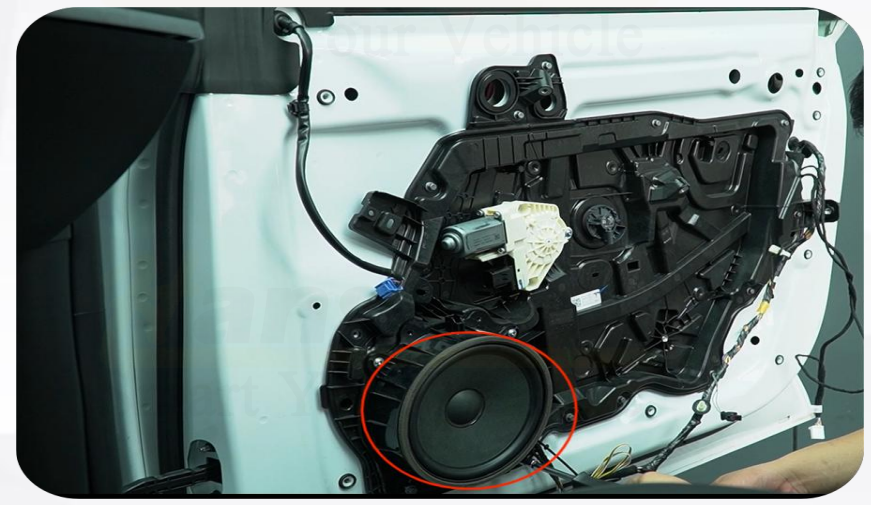


23. Secure the speaker by tightening the screws

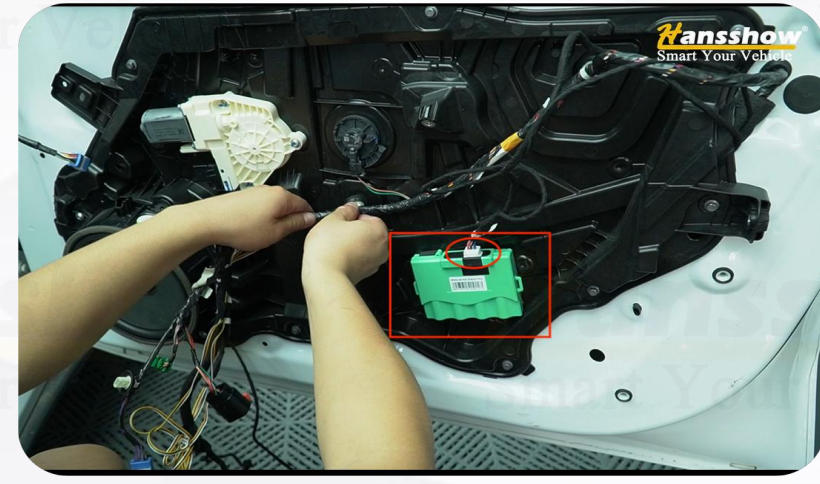

24. Attach the control box to the back using 3M adhesive, then plug in the adapter cable connector

Installation Step

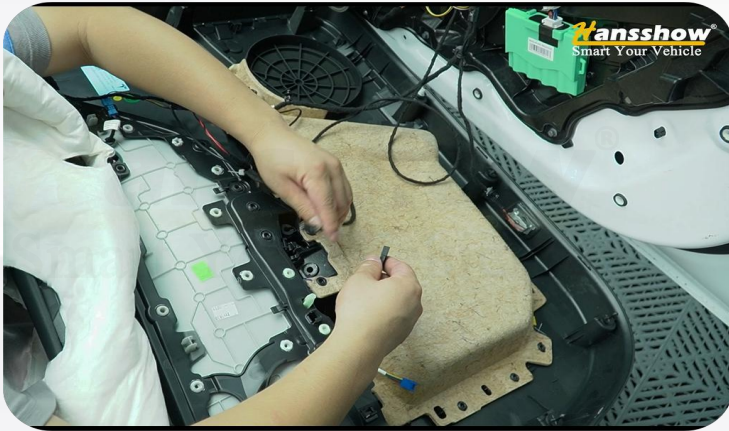


25. Restore the original connection of the wires in the car door



26. After installing the window sealing strip, reinstall the car door



27. Secure the three screws and then install the speaker

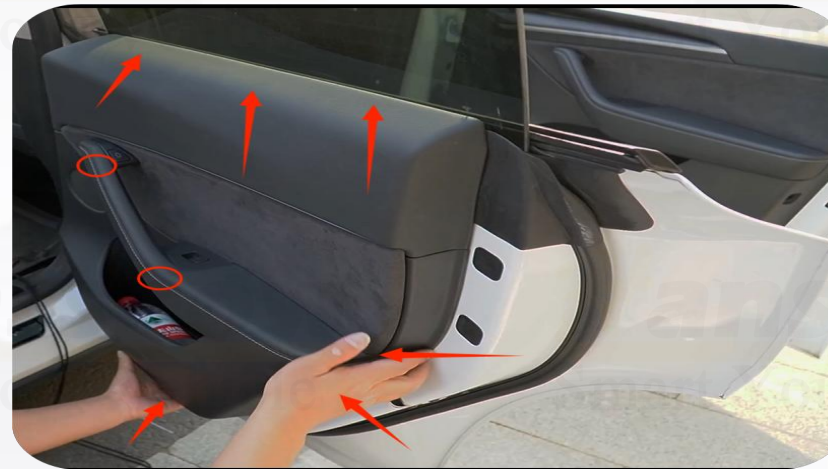

28. Loosen the two screws, pry open the clips, and lift the door upwards to remove it

Installation Step



29. Disconnect the door wires



30. Pry open the window rubber seal and remove it (the rubber seal has small clips inside)




31. Loosen the two screws and remove the car window



32. Loosen the screws around the inner panel


Installation Step

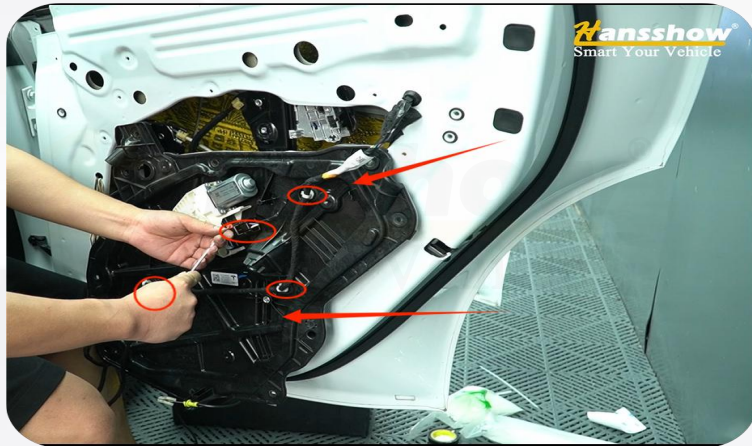


33. After unplugging the connector, pry open the fastening wires from the inner panel and remove the inner panel



34. Remove the original door handle and install the auto door handle (follow the same installation method as before)

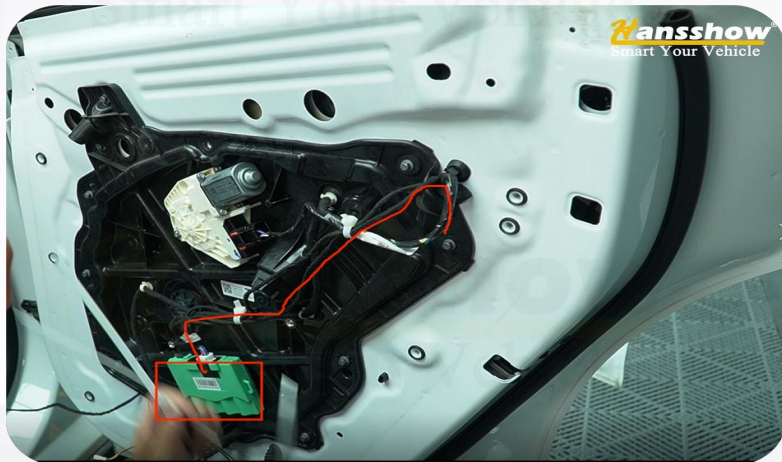

35. Route the wire out from this location and connect it to the control box (secure the backside with 3M adhesive)

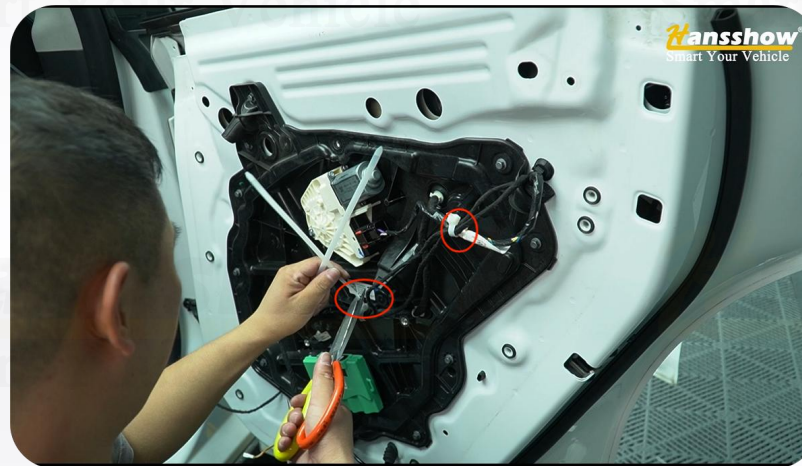

36. Secure the wires with cable ties and then restore the car to its original state


Installation Step



37. Remove this trim panel



38. Pry open this clip and remove the kick plate

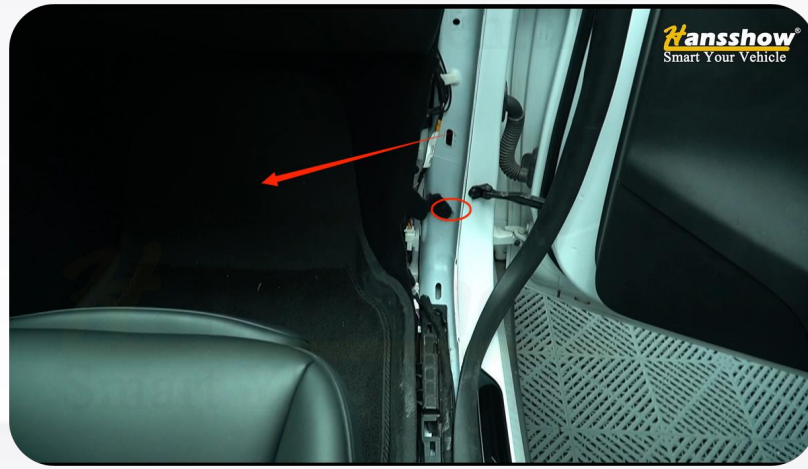


39. Pry open this clip and pull it towards the left




40. Plug the power cable (white plug) into the control box


Installation Step

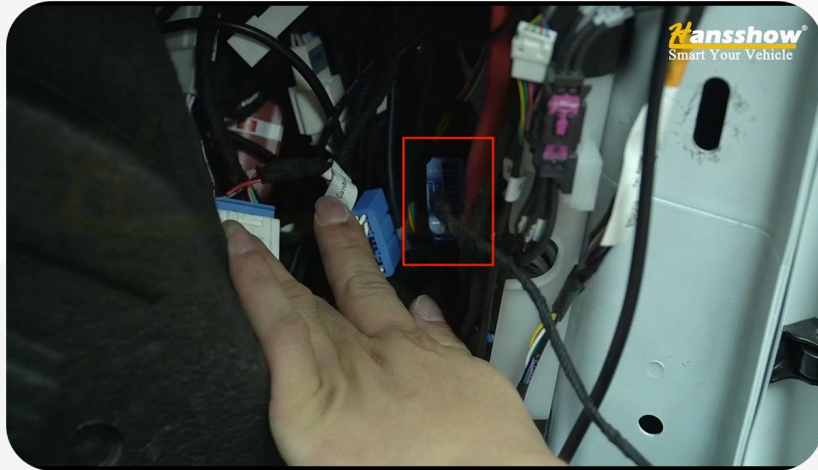


41. Connect the blue male plug to the blue female plug (original vehicle)

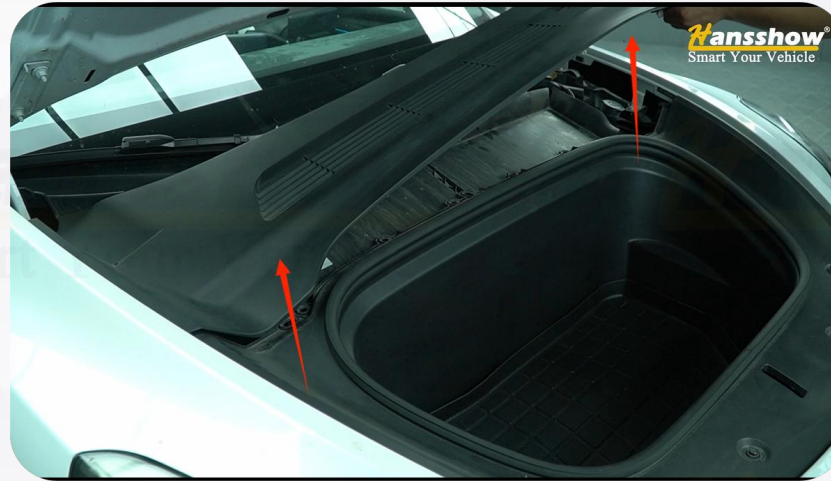

42. Remove the cover of the frunk

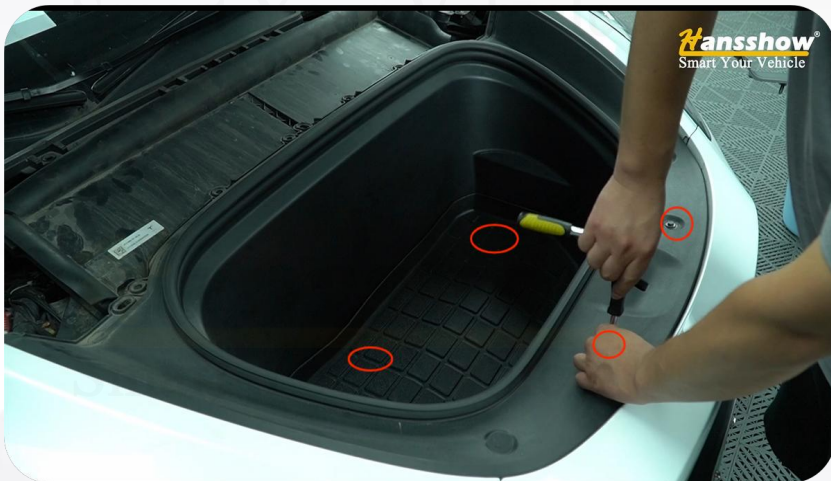

43. Loosen these four screws (after removing the pad, there are two screws inside)

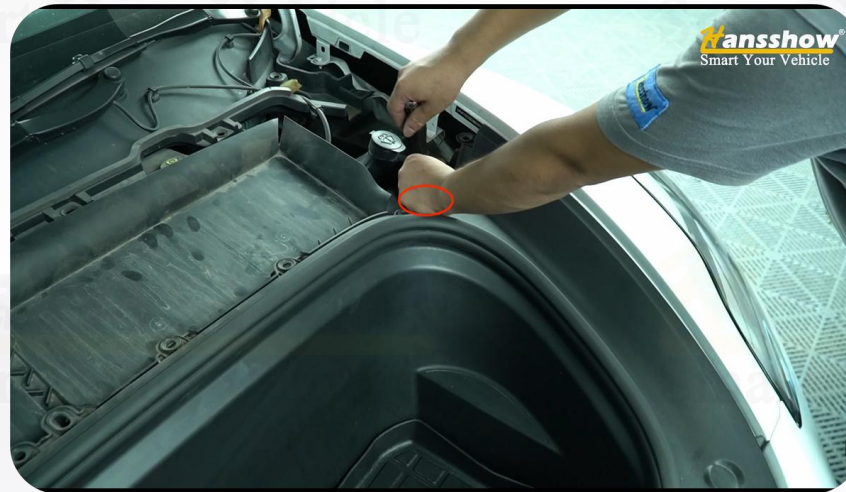


44. Loosen the screws (the same applies to the left and right sides)


Installation Step




45. Remove the cover plate

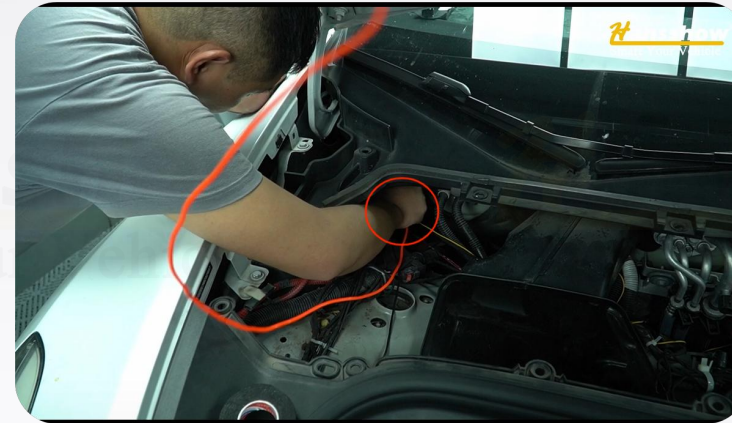

46. Guide the threading tool along the rubber grommet to the passenger footwell area

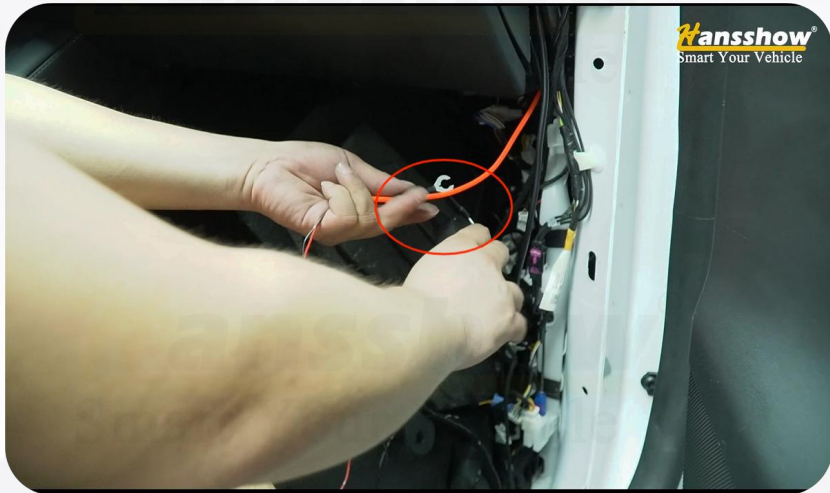

47. Wrap the positive and negative wires with the threading tool and pull them to the battery location.

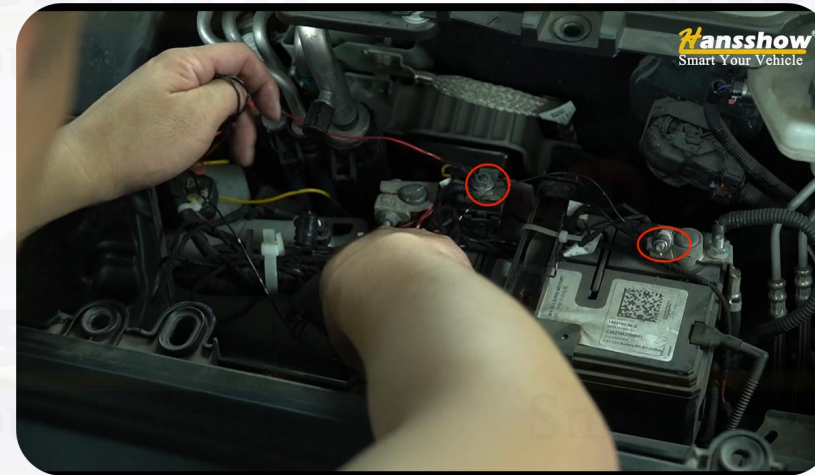

48. Secure the positive and negative wires by tightening the screws and use cable ties to secure the wire harness. Then, restore the vehicle to its original state

Common Troubleshooting Guide

Problem	Reason	Solution
How to switch the light color?	Switch the light color by manually clicking the button inside the door handle	Please refer to the detailed pictures for instructions
How many colors are there for switching?	There are seven colors available for switching: Colorful, White, Green, Blue, Yellow, Red, and Purple	
The handle does not pop open	Check if the spacer is installed	Install the spacer
	The handle wire is faulty	Swap the handle wires between the corresponding control box and the handle wire on the same side for troubleshooting
Unable to automatically pop open upon approach	Check if the control box Bluetooth is connected	Connect the control box to Bluetooth
The light strip doesn't light up	Check if the wiring harness is properly installed and functioning	Unplug and reinsert the interface
Press the handle to pop open, and the door will also automatically open	Check if the wiring harness is properly installed and functioning	If not installed, proceed with installation; if already installed, remove it